



PARKWAY COVER ASSEMBLY

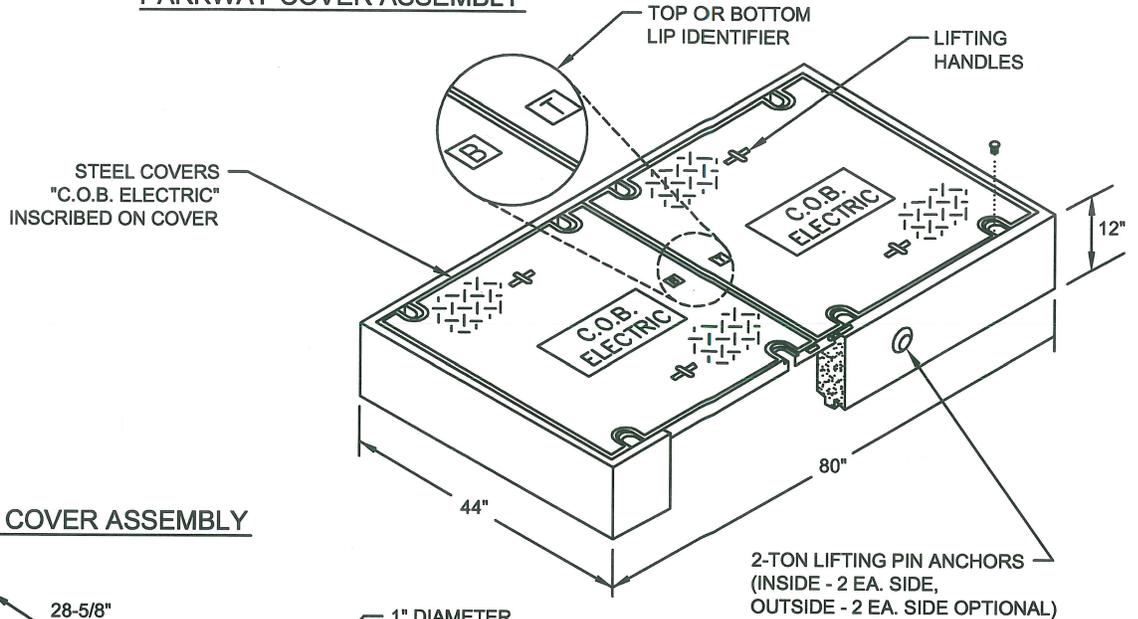

TRAFFIC COVER ASSEMBLY

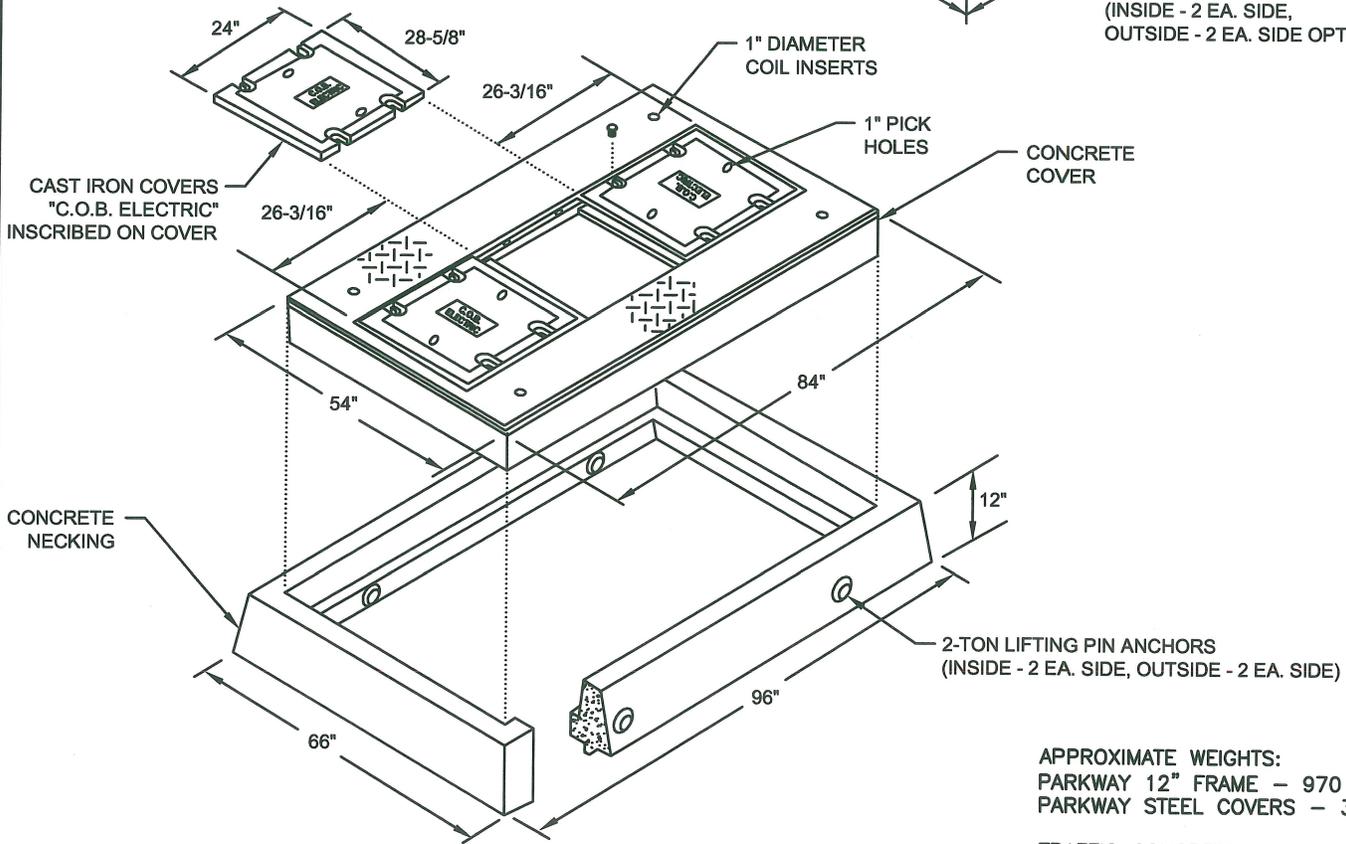


APPROXIMATE WEIGHTS:
 PARKWAY 12" FRAME - 970 LBS.
 PARKWAY STEEL COVERS - 300 LBS.

TRAFFIC CONCRETE NECKING - 2245 LBS.
 TRAFFIC CONCRETE COVER - 2000 LBS.
 TRAFFIC CAST IRON COVERS - 705 LBS.

NOTES:

1. LOCATE VAULT AS DIRECTED BY C.O.B. ELECTRIC UTILITY.
2. INSTALL GROUNDING PER C.O.B. STANDARD DRAWING #600-20.
3. INSTALL A MINIMUM 8" OF 3/4" CRUSHED ROCK UNDER VAULT.
4. ALLOW UP TO 3" OF EXTRA EXCAVATION DEPTH FOR ADJUSTING LID TO FINAL GRADE.

REF: 3314.1



REVISED: 10/31/2011

APPROVED: *R. P. 11-7-11*

STANDARD DRAWINGS

CONCRETE VAULT COVER, 36"x72"

SD

600-51